



Ametalin

Performance insulation for a greener world

Sub-tropics Insulation Range

Ametalin SilverSark® | SilverWrap® | VapourTech® and Micro-perforated range for drained cavity walls.



Residential & Commercial

Reflective vapour and weather barrier insulation and vapour permeable ranges.

For use in ABCB climate zones 2 - 3.

Ametalin
Performance insulation for a greener world

SilverSark® HD
Heavy Duty

81m² COVERAGE | WIDTH: 1350 mm | LENGTH: 60 m | AREA: 81 m²

Reflective roof and wall insulation
For tile or metal roofs and walls in residential and commercial buildings

- Class 2 Vapour Barrier, Air and Water Barrier
- Superior strength and puncture resistant
- Ideal for all BALs in bushfire-prone areas

APPLICATIONS WHERE THIS PRODUCT CAN BE USED:

Application	Climate Zone	1	2	3	4	5	6	7	8
ROOF - tile/metal	Climate Zone	1	2	3	4	5			
ROOF - Recycled metal/insulation	Climate Zone	1	2	3	4	5	6	7	8
WALL - Lightweight Cladding	Climate Zone	1	2	3					
WALL - Brick veneer	Climate Zone	1	2	3					
OVERDOOR WALL	Climate Zone	1	2	3	4	5	6	7	8

Ametalin
Performance insulation for a greener world

SilverWrap® xRS MD
Extra R-value
Medium Duty

45m² COVERAGE | WIDTH: 1500 mm | LENGTH: 30 m | AREA: 45 m²

Outward reflective roof and wall insulation
For use in masonry veneer wall systems in residential and commercial buildings requiring High Vapour Barriers

- Innovative reflective design, converts brick veneer steel-frame into timber-frame for NCC energy efficiency
- Class 1 Vapour Barrier, Air and Water Barrier
- Ideal for all BALs in bushfire-prone areas

APPLICATIONS WHERE THIS PRODUCT CAN BE USED:

Application	Climate Zone	1	2	3	4	5	6	7	8
ROOF - tile/metal	Climate Zone	1	2	3	4	5			
ROOF - Recycled metal/insulation	Climate Zone	1	2	3	4	5	6	7	8
BAL - Lightweight Cladding	Climate Zone	1	2	3					
BAL - Brick veneer	Climate Zone	1	2	3					
OVERDOOR WALL	Climate Zone	1	2	3	4	5	6	7	8

Ametalin
Performance insulation for a greener world

SilverWrap® MD
Medium Duty

81m² COVERAGE | WIDTH: 1350 mm | LENGTH: 60 m | AREA: 81 m²

Reflective wall and roof insulation
For tile or metal roofs and walls in residential and commercial buildings

- Achieves Group 1 Fire Performance Classification for wall/cladding lining
- Class 2 Vapour Barrier, Air and Water Barrier
- Ideal for all BALs in bushfire-prone areas

APPLICATIONS WHERE THIS PRODUCT CAN BE USED:

Application	Climate Zone	1	2	3	4	5	6	7	8
ROOF - tile/metal	Climate Zone	1	2	3	4	5			
ROOF - Recycled metal/insulation	Climate Zone	1	2	3	4	5	6	7	8
BAL - Lightweight Cladding	Climate Zone	1	2	3					
BAL - Brick veneer	Climate Zone	1	2	3					
OVERDOOR WALL	Climate Zone	1	2	3	4	5	6	7	8

Ametalin
Performance insulation for a greener world

VapourTech® Wall
Light Wall Duty

45m² COVERAGE | WIDTH: 1500 mm | LENGTH: 30 m | AREA: 45m²

Vapour permeable wall insulation
For use behind all types of cladding and in all wall systems in ABCB Climate Zones 2-8

- Class 4 Vapour Permeable, Air and Water Barrier
- Advanced weather barrier and vapour control membrane
- Triple layer construction for durability
- High wind load performance to 3.45 kPa
- Ideal for all BALs in bushfire-prone areas
- High UV resistance - up to 90 days

APPLICATIONS WHERE THIS PRODUCT CAN BE USED:

Application	Climate Zone	1	2	3	4	5	6	7	8
WALL - Lightweight Cladding	Climate Zone	1	2	3	4	5	6	7	8
WALL - Brick veneer	Climate Zone	1	2	3	4	5	6	7	8

For full product range and approved accessories please visit,

www.ametalin.com



Ametalin

Performance insulation for a greener world

SilverSark[®] HVB

Reflective High Vapour Barrier.



Extra Heavy Duty

Reflective wall insulation

For Climate Zone 1 wall systems in residential and commercial buildings.

Class 1 Vapour Barrier

Air and Water Barrier

Superior strength, puncture resistant

Low Flammability

Can also be used for tile
and metal roofs



Available roll size: **1350 mm x 60 m (81 m²)**



Ametalin

Performance insulation for a greener world

SilverSark[®] HD

The traditional reflective weather barrier.



Heavy Duty

Reflective roof and wall insulation

For tile or metal roofs and walls in residential and commercial buildings.

The all-round weather barrier
for your home

Superior strength, puncture resistant

Water and Air Barrier

Class 2 Vapour Barrier

Low Flammability



Available roll size: **1500 mm x 30 m (45 m²)** | **1200 mm x 60 m (72 m²)**
1350 mm x 60 m (81 m²)




Ametalin

Performance insulation for a greener world

SilverWrap™ MD

The traditional light weight reflective weather barrier.

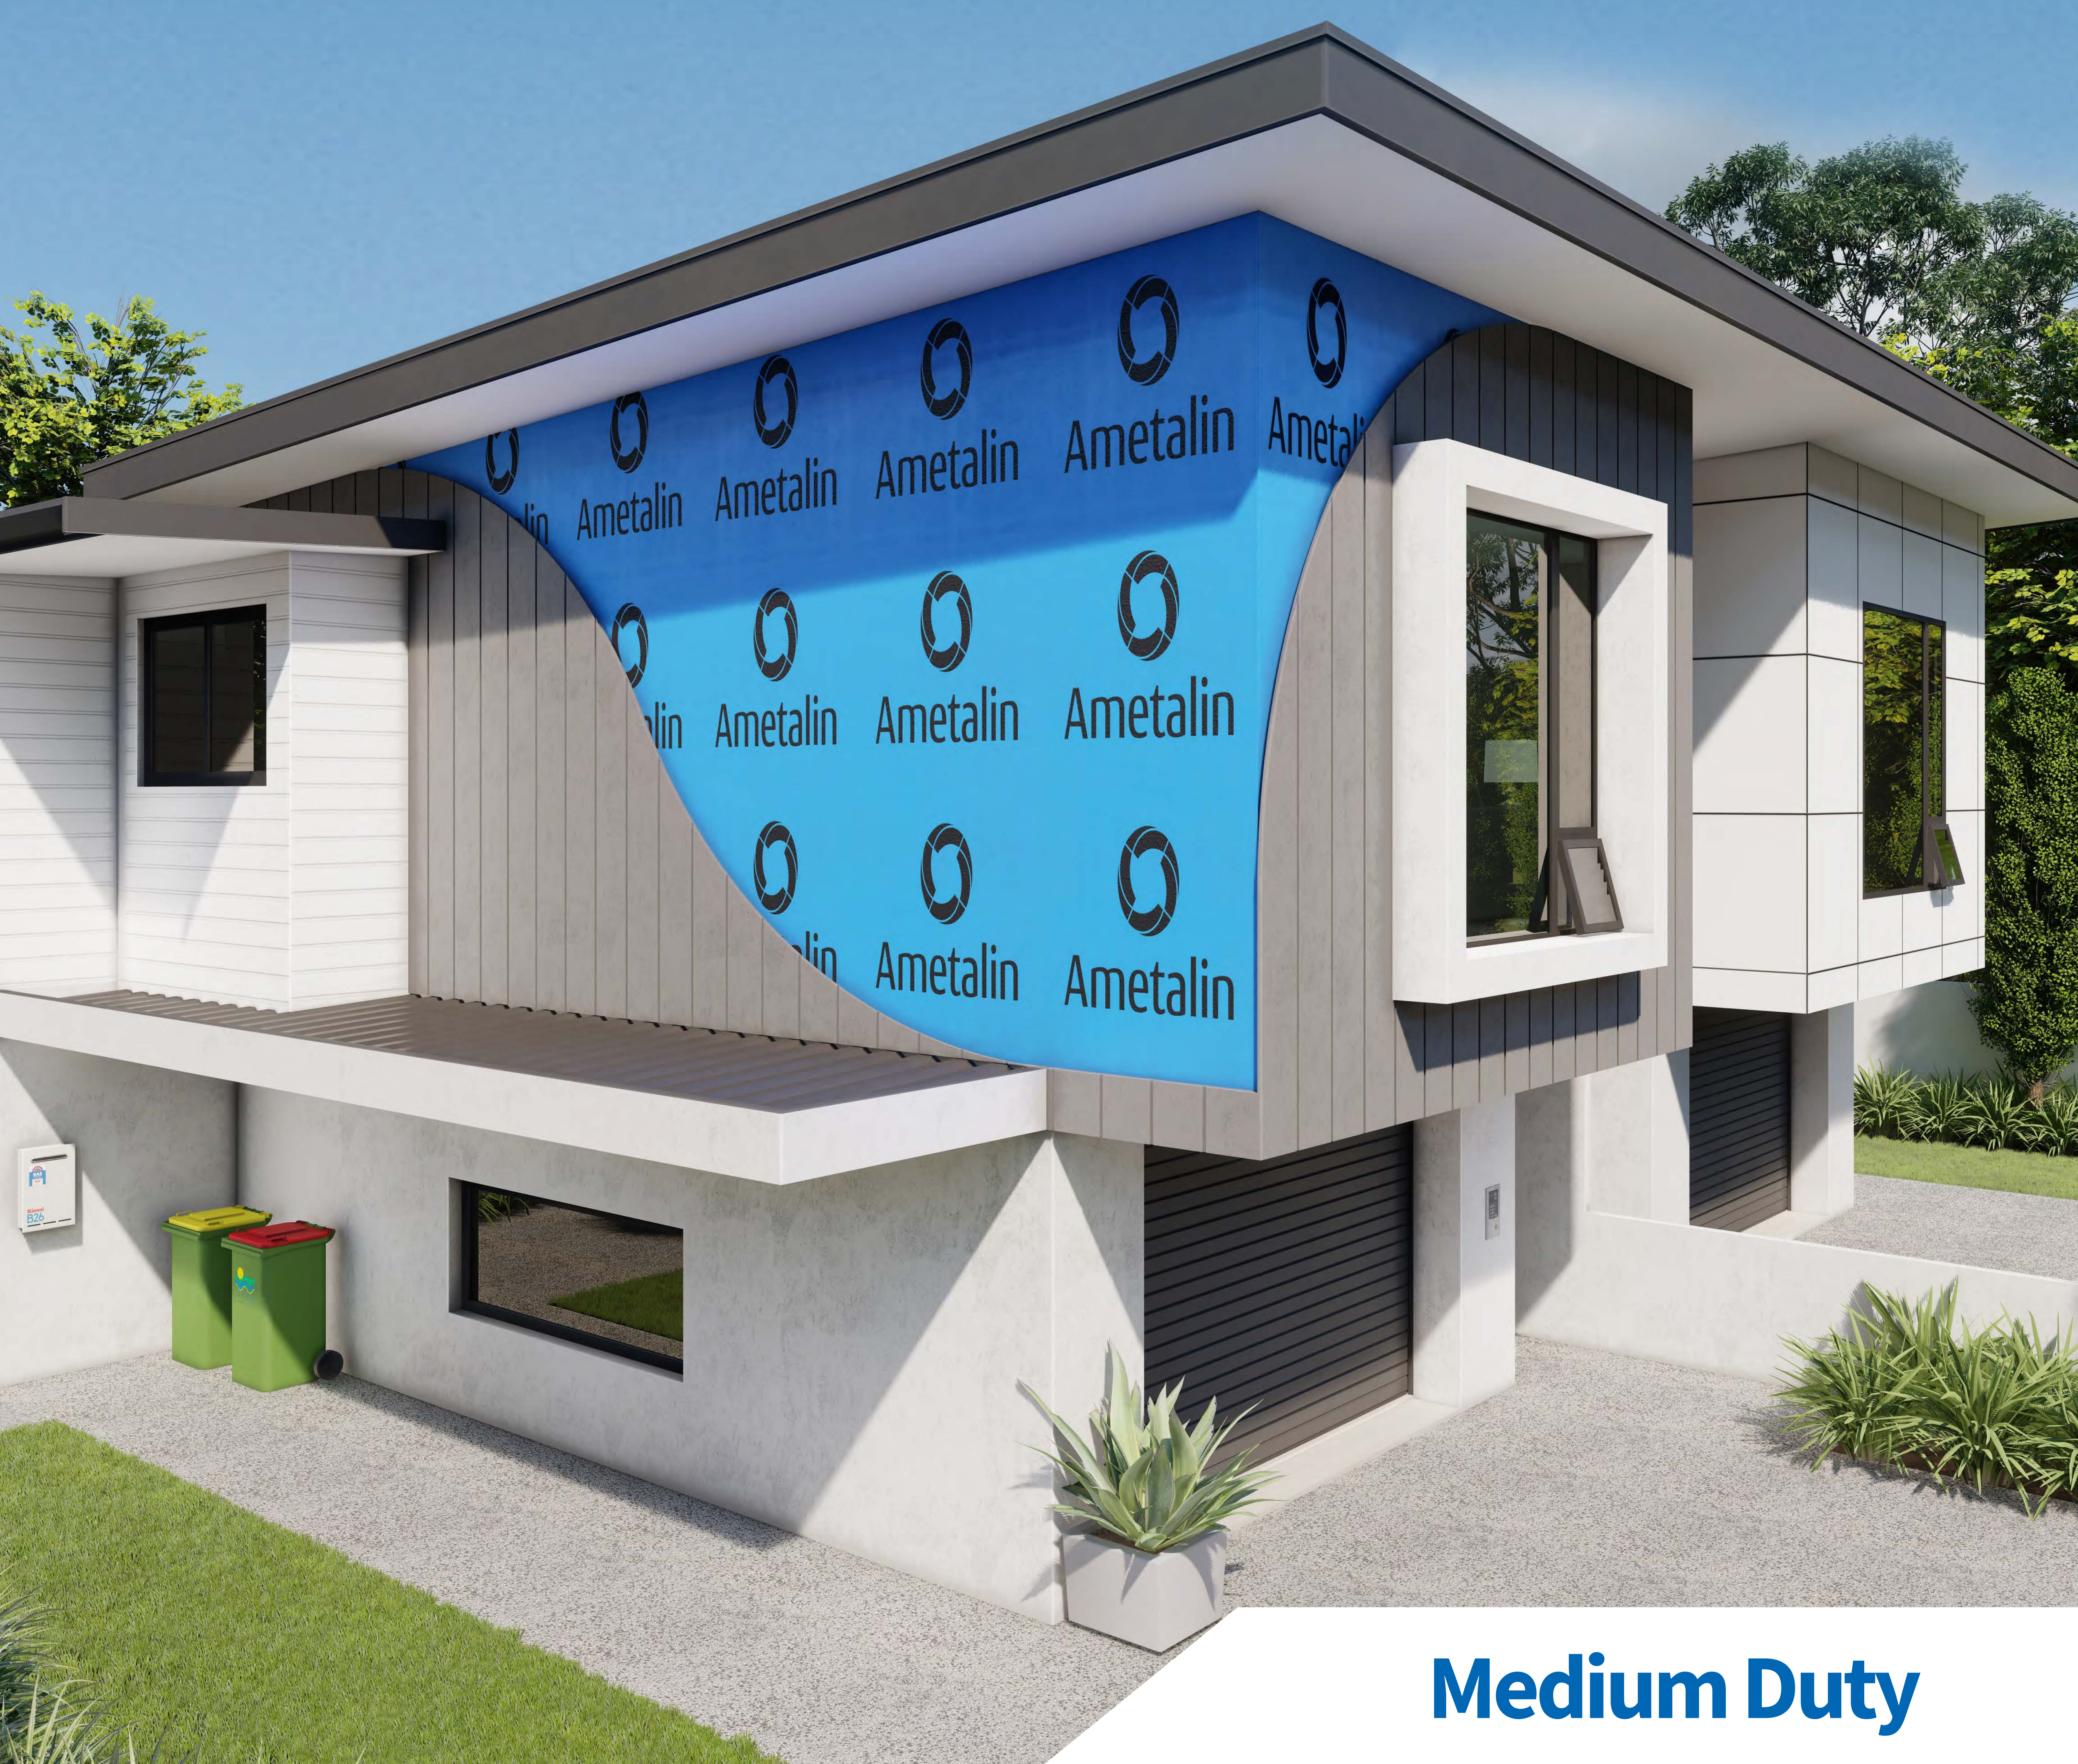

Medium Duty

Reflective wall and roof insulation

For walls systems in Climate Zones 1, 2 and 3.

Achieves Group 1 Fire Performance Classification for wall/ceiling lining

Water and Air Barrier, Class 2 Vapour Barrier

Low Flammability, suitable for all BALs in bushfire-prone areas

Can also be used for residential and commercial roofs



Available roll size: **1350 mm x 30 m (40.5 m²) | 1500 mm x 30 m (45 m²)**
1350 mm x 60 m (81 m²)



Ametalin

Performance insulation for a greener world

SilverSark[®] xR HD Extra R-value

High performance reflective weather barrier.



Heavy Duty

Reflective roof and wall insulation

For walls and tile or metal roofs in residential and commercial buildings.

The best all-round weather barrier for your home

Superior strength, puncture resistant

Water and Air Barrier,
Class 2 Vapour Barrier

Innovative low-glare,
high IR reflection ink technology

Low Flammability



Available roll size: **1500 mm x 30 m (45 m²)** | **1350 mm x 60 m (81 m²)**



Ametalin

Performance insulation for a greener world

FireSark[®]

The all-in-one fire-resistant reflective insulation and wall wrap for the most extreme Bushfire Attack Levels and Non-combustible constructions.



Extra Heavy Duty

Fire resistant reflective insulation

For use in all roof and wall types in Non-Combustible constructions and ideal for use in all BAL zones.

Ember-proof

Ideal for all BAL zones to FZ bushfire-prone areas

Water and Air Barrier

Class 2 Vapour Barrier

97% reflective



Available roll size: **1350 mm x 30 m (40.5 m²)**



Ametalin

Performance insulation for a greener world

Thermal Insulation Range

Ametalin ThermalBreak™, ThermalLiner™ and ThermalFloor™ for year-round thermal comfort and energy efficiency in your home and shed.

Residential & Commercial

Available roll size: **ThermalBreak™** 7mm x 1350mm x 22.25m (30m²)

ThermalLiner™ 4mm x 1500mm x 20m (30m²)

ThermalFloor™ 4 mm x 500 mm x 60 m (30 m²)



Roof and wall home insulation

For R0.2 thermal break in-situ performance for steel framed residential construction.



Roof and wall shed insulation

For residential or commercial sheds



Underfloor insulation

For under floors that are adhered directly to floor joists

• Scored for quick and easy installation

• Double-sided foil radiant barrier

• Low Flammability

For full product range and approved accessories please visit,

www.ametalin.com



Ametalin

Performance insulation for a greener world

ThermalLiner™

High performance thermal break insulation for residential or commercial sheds.

Extra Heavy Duty

Roof and wall shed insulation

For residential homes or commercial sheds.

Flexible R0.11 reflective foam insulation liner

Low glare

Acoustic dampener

Low Flammability, suitable for all BAL's in bushfire-prone areas



Available roll size: **1500 mm x 20 m (30 m²)**



Ametalin

Performance insulation for a greener world

SilverSark[®] XHD

The traditional reflective weather barrier.



Extra Heavy Duty

Reflective roof and wall insulation

For tile or metal roofs and walls in residential and commercial buildings.

The all-round weather barrier
for your home

Superior strength, puncture resistant

Water and Air Barrier

Class 2 Vapour Barrier

Low Flammability



Available roll size: **1500 mm x 30 m (45 m²)** | **1200 mm x 60 m (72 m²)**
1350 mm x 60 m (81 m²)



Ametalin

Performance insulation for a greener world

SilverWrap™ MD

The traditional light weight reflective weather barrier.



Medium Duty

Reflective wall and roof insulation

For walls systems in Climate Zones 1, 2 and 3.

Achieves Group 1 Fire Performance Classification for wall/ceiling lining

Water and Air Barrier, Class 2 Vapour Barrier

Low Flammability, suitable for all BALs in bushfire-prone areas

Can also be used for residential and commercial roofs



Available roll size: **1350 mm x 30 m (40.5 m²) | 1500 mm x 30 m (45 m²)**
1350 mm x 60 m (81 m²)



Ametalin

Performance insulation for a greener world

SilverWrap™ LD

The traditional light weight reflective weather barrier.



Light Duty

Reflective wall insulation

For walls systems in Climate Zones 1, 2 and 3.

Tear resistant light weight weather barrier

Achieves Group 1 Fire Performance Classification for wall/ceiling lining

Water and Air Barrier, Class 2 Vapour Barrier

Low Flammability



Available roll size: **1350 mm x 10 m (13.5 m²) | 1500 mm x 30 m (45 m²)**
1350 mm x 60 m (81 m²)



Ametalin

Performance insulation for a greener world

VapourTech® RWC Roof Wall Commercial

Advanced weather barrier and vapour control membrane for condensation management in roofs and walls.



Medium Duty

Vapour permeable roof and wall Insulation

For use in commercial and residential roofs, facades and wall systems in ABCB Climate Zones 2-8.

Class 4 Vapour Permeable

Air and Water Barrier

Reinforced four-layer construction for high strength, tear and puncture resistance

Ideal for all BALs in bushfire-prone areas

High UV resistance - up to 90 days



Available at
BUNNINGS
warehouse

For full product range and approved accessories:
www.bunnings.com.au
www.ametalin.com





Ametalin

Performance insulation for a greener world

VapourTech® RWC Roof Wall Commercial

Advanced weather barrier and vapour control membrane for condensation management in roofs and walls.




Medium Duty

Vapour permeable roof and wall Insulation

For use in commercial and residential roofs, facades and wall systems in ABCB Climate Zones 2-8.

Recommended accessories:

- > Class 4 Vapour Permeable, Air and Water Barrier
- > Advanced weather barrier and vapour control membrane
- > Reinforced four-layer construction for high strength, tear and puncture resistance
- > Ideal for all BALs in bushfire-prone areas
- > High UV resistance - up to 90 days

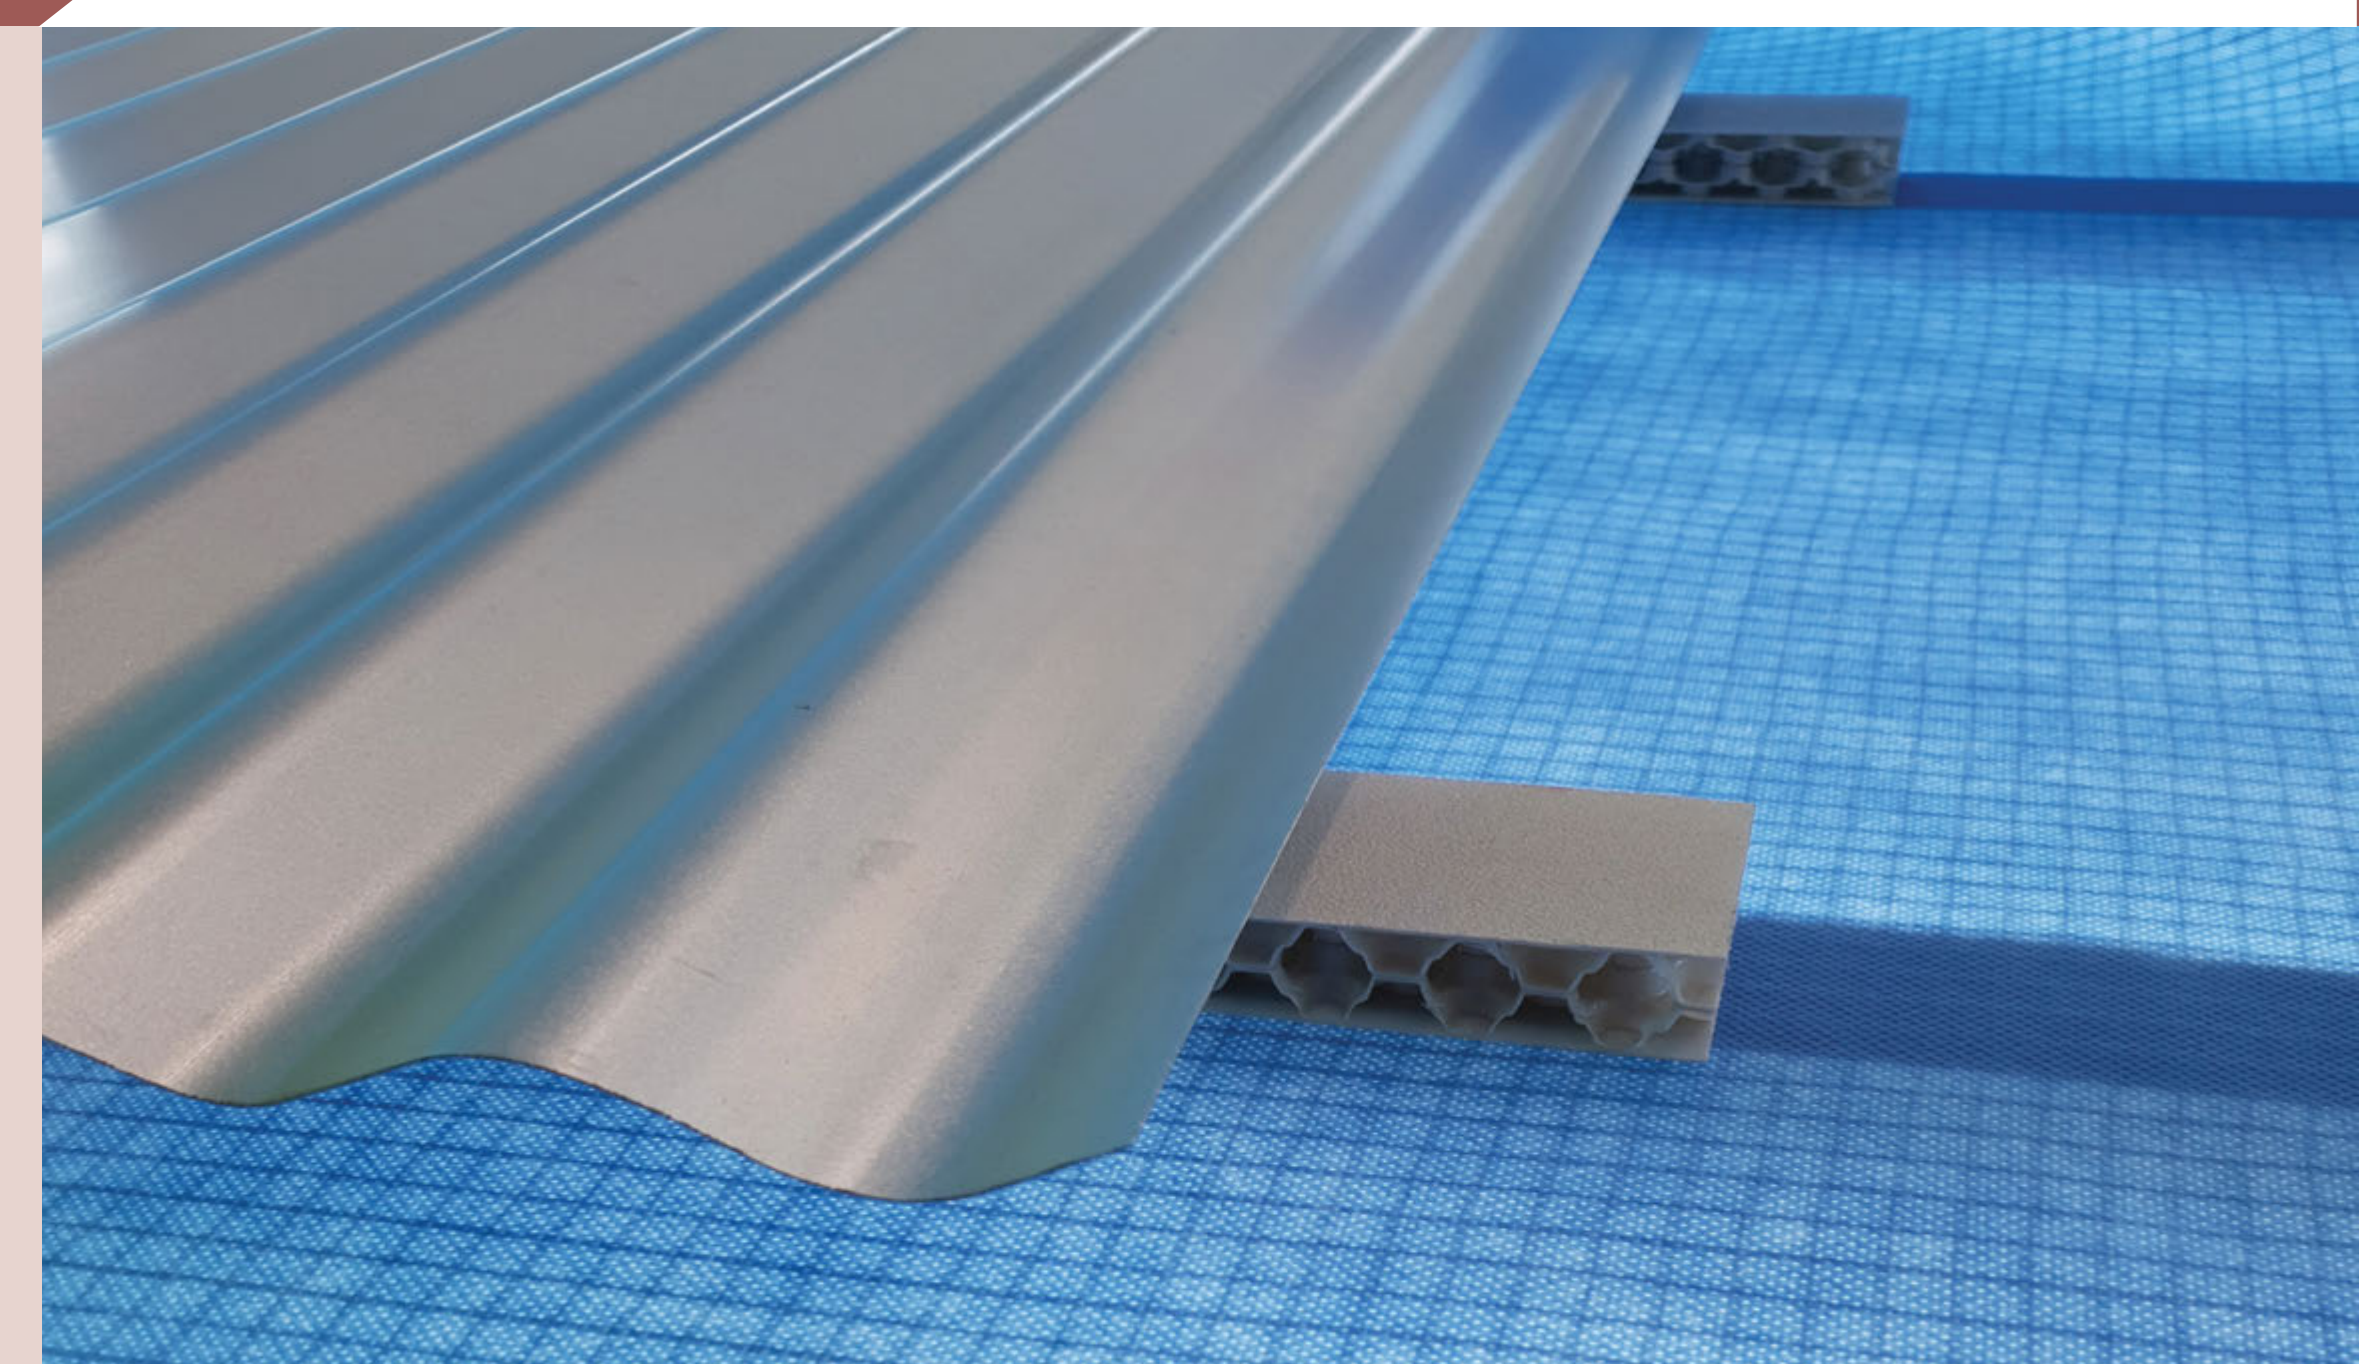

ThermalCav Drainage Battens



For more information, visit our website or scan the QR code:

www.ametalin.com/products/vapourtech-rwc-roof-wall-commercial/





Ametalin

Performance insulation for a greener world

VapourTech® Wall

Next generation permeable air barrier technology for walls.



Light Wall Duty

Vapour Permeable wall insulation

For use behind all types of cladding and in all wall systems in climate zones 2-8.

Class 4 Vapour Permeable

Advanced water, air and vapour control membrane

Triple layer construction for durability

Low Flammability, suitable for all BALs in bushfire-prone areas



Available roll size: **1370 mm x 30 m (41 m²)** | **1500 mm x 30 m (45 m²)**



Ametalin

Performance insulation for a greener world

VapourTech® Brane® VHP

Superior vapour permeance technology for condensation management in walls



Light Wall Duty

Vapour Permeable wall insulation

For moisture control behind all types of cladding and in all wall systems in Climate Zone 2-8

Low Flammability

Class 4 Vapour Permeable

Water Barrier

Triple layer construction for durability



Available at
BUNNINGS
warehouse

Available roll size:

- 1370 mm x 30 m (41 m²)
- 2740 mm x 30 m (82.2m²)
- 1500 mm x 30 m (45 m²)