



Ametalin

Performance insulation for a greener world

Temperate Cool Alpine Range

For use in NCC2022 - ABCB Climate Zones 4-8



Residential & Commercial


Vapour Permeable, weather barrier insulation

For roofs and L.C. walls.

<p>Performance insulation for a greener world</p> <p>VapourTech® Brane VHP</p> <p>Light Wall Duty</p> <p>45 m² COVERAGE WIDTH: 1500 mm LENGTH: 30 m AREA: 45 m²</p> <p>Vapour Permeable wall insulation</p> <p>For use behind all types of cladding in all wall systems in ABCB Climate Zones 2-8</p> <ul style="list-style-type: none"> Class 4 Vapour Permeable Water Barrier and vapour control membrane Triple layer construction for durability Ideal for all BALs in bushfire-prone areas UV resistance - up to 90 days 	<p>Performance insulation for a greener world</p> <p>VapourTech® Wall</p> <p>Light Wall Duty</p> <p>45 m² COVERAGE WIDTH: 1500 mm LENGTH: 30 m AREA: 45 m²</p> <p>Vapour permeable wall insulation</p> <p>For use behind all types of cladding and in all wall systems in ABCB Climate Zones 2-8</p> <ul style="list-style-type: none"> Class 4 Vapour Permeable, Air and Water Barrier Advanced weather barrier and vapour control membrane Triple layer construction for durability High wind load performance to 3.45 kPa Ideal for all BALs in bushfire-prone areas High UV resistance - up to 90 days 	<p>Performance insulation for a greener world</p> <p>VapourTech® RWC Roof Wall Commercial</p> <p>Medium Duty</p> <p>45 m² COVERAGE WIDTH: 1500 mm LENGTH: 30 m AREA: 45 m²</p> <p>Vapour permeable roof and wall insulation</p> <p>For use in commercial and residential roofs, facades and wall systems in ABCB Climate Zones 2-8</p> <ul style="list-style-type: none"> Class 4 Vapour Permeable, Air and Water Barrier Advanced weather barrier and vapour control membrane Reinforced four-layer construction for high strength, tear and puncture resistance Ideal for all BALs in bushfire-prone areas High UV resistance - up to 90 days 	<p>Performance insulation for a greener world</p> <p>SilverWrap® MD Micro-perforated</p> <p>Medium Duty</p> <p>40.5 m² COVERAGE WIDTH: 1350 mm LENGTH: 30 m AREA: 40.5 m²</p> <p>Vapour Permeable reflective wall insulation</p> <p>For use in brick veneer and drained cavity wall systems in residential and commercial buildings in ABCB Climate Zones 2-8</p> <ul style="list-style-type: none"> Class 4 Vapour Permeable, Air Barrier Non-water Barrier Strong and light weight Ideal for all BALs in bushfire-prone areas 	<p>Performance insulation for a greener world</p> <p>CeaseFire®</p> <p>Extra Heavy Duty</p> <p>45 m² COVERAGE WIDTH: 1500 mm LENGTH: 30 m AREA: 45 m²</p> <p>Fire resistant vapour permeable roof and wall insulation</p> <p>For use in commercial and residential fire-resisting buildings and facades in ABCB Climate Zones 2-8</p> <ul style="list-style-type: none"> Non-combustible - glass, timber proof and smoke barrier Superior choice for all BALs in bushfire-prone areas Class 4 Vapour Permeable, Air and Water Barrier Group 1 fire performance for linings High wind load performance to 3.45 kPa Extreme UV resistance - up to 180 days
---	---	---	--	---

Reflective Class 4 Vapour Permeable For Drained Cavity Walls.

View Range

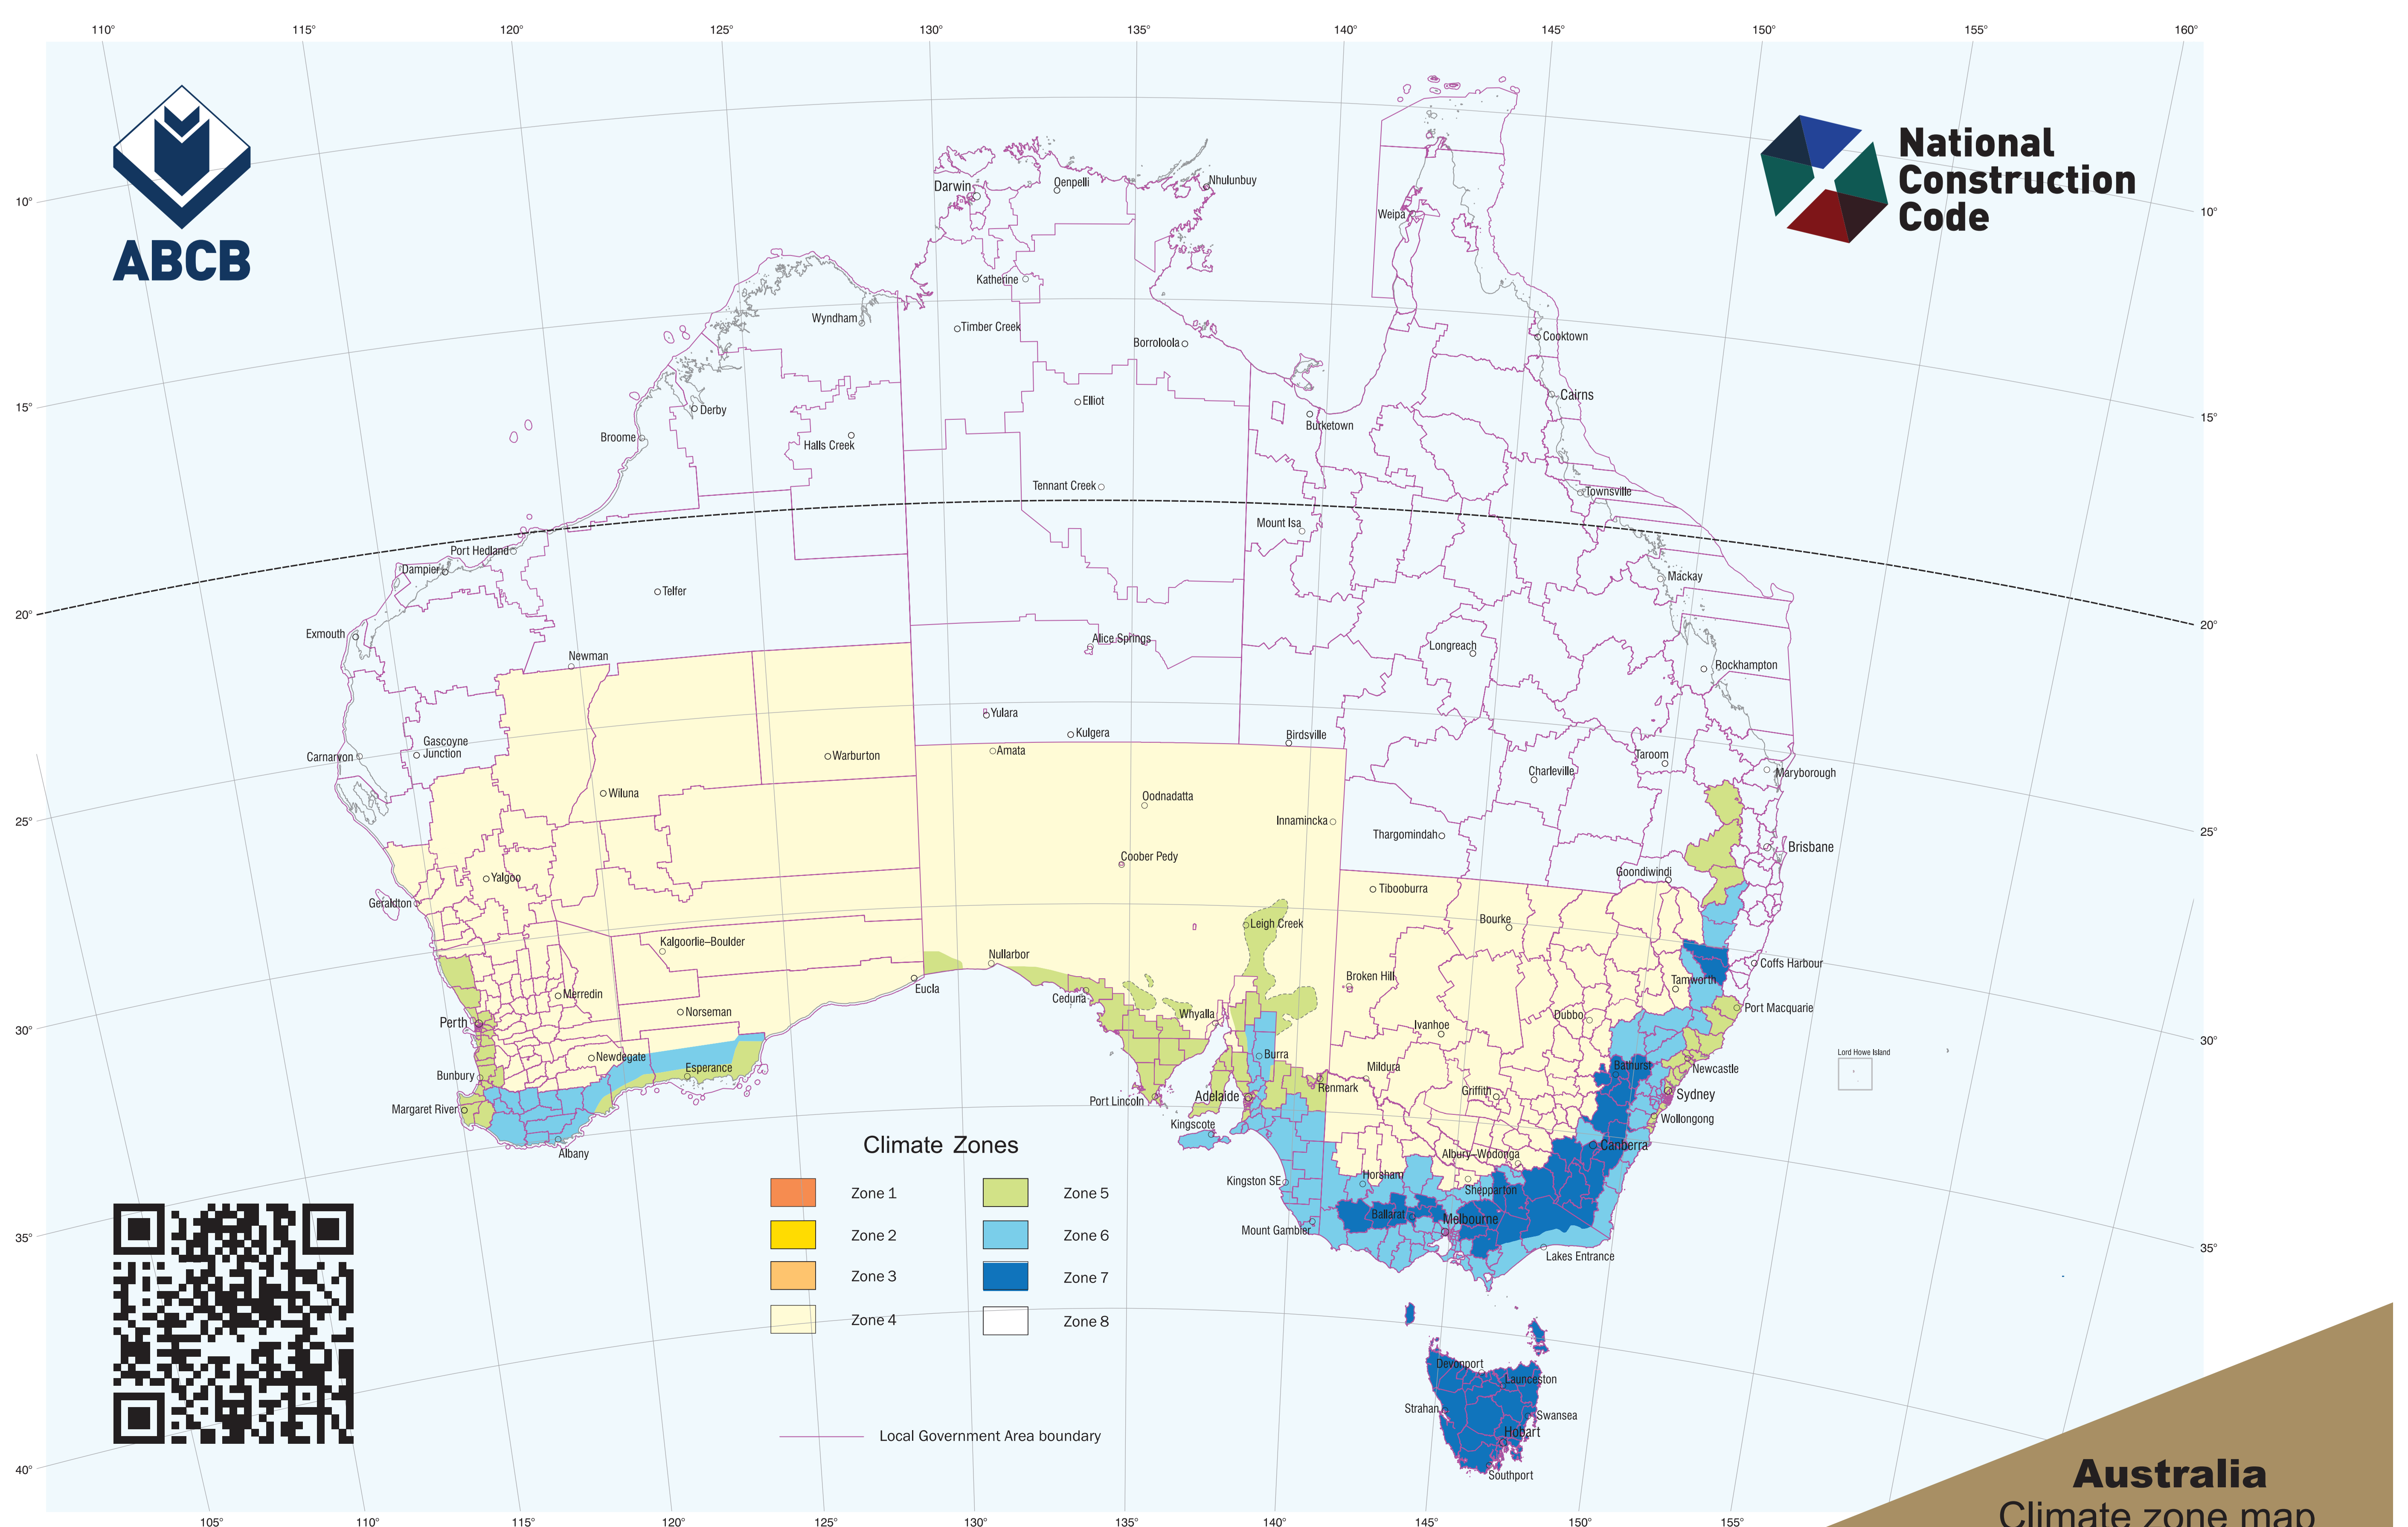



Ametalin

Performance insulation for a greener world

CeaseFire®

The ultimate fire resisting, weather-proofing and vapour management membrane for NCC DtS Non-combustible and fire-resisting systems in Australian buildings.



Extra Heavy Duty

Fire resistant roof & wall insulation

For use in DtS fire resisting constructions in ABCB climate zones 2-8

DtS Non-combustible

Class 4 Vapour Permeable

Air and Water Barrier

Group 1 fire performance
for linings

Ember proof



Available roll size: **1500 mm x 30 m (45 m²)**



Ametalin

Performance insulation for a greener world

VapourTech® RWC Roof Wall Commercial

Advanced weather barrier and vapour control membrane for condensation management in roofs and walls.



Medium Duty

Vapour permeable roof and wall Insulation

For use in commercial and residential roofs, facades and wall systems in ABCB Climate Zones 2-8.

Class 4 Vapour Permeable

Air and Water Barrier

Reinforced four-layer construction for high strength, tear and puncture resistance

Ideal for all BALs in bushfire-prone areas

High UV resistance - up to 90 days



Available at
BUNNINGS
warehouse

Available roll size: **1500 mm x 30 m (45 m²)**



Ametalin

Performance insulation for a greener world

VapourTech® Wall

Next generation permeable air barrier technology for walls.



Light Wall Duty

Vapour Permeable wall insulation

For use behind all types of cladding and in all wall systems in climate zones 2-8.

Class 4 Vapour Permeable

Advanced water, air and vapour control membrane

Triple layer construction for durability

Low Flammability, suitable for all BALs in bushfire-prone areas



Available roll size: **1370 mm x 30 m (41 m²)** | **1500 mm x 30 m (45 m²)**



Ametalin

Performance insulation for a greener world

VapourTech® Brane® VHP

Superior vapour permeance technology for condensation management in walls



Light Wall Duty

Vapour Permeable wall insulation

For moisture control behind all types of cladding and in all wall systems in Climate Zone 2-8

Low Flammability

Class 4 Vapour Permeable

Water Barrier

Triple layer construction for durability



Available at
BUNNINGS
warehouse

Available roll size:

- 1370 mm x 30 m (41 m²)
- 2740 mm x 30 m (82.2m²)
- 1500 mm x 30 m (45 m²)



Ametalin

Performance insulation for a greener world

Micro-perforated Insulation Range

Ametalin SilverWrap™ xRS Micro-perforated, FireSark® Micro-perforated, SilverWrap™ xR Micro-perforated & SilverWrap™ Micro-perforated



Residential & Commercial

Vapour Permeable reflective wall insulation

For use in brick veneer and drained cavity wall systems in residential and commercial buildings.

Ametalin
Performance insulation for a greener world

FireSark® Micro-perforated
Extra Heavy Duty

40.5m² COVER **WIDTH:** 1350 mm
LENGTH: 30 m **AREA:** 40.5 m²

Fire resistant permeable reflective wall insulation

For use in Non-Combustible constructions in multi-storey residential and commercial buildings

- Ember-proof
- Ideal for all BAL zone wall systems to FZ bushfire-prone areas
- Air Barrier, Class 3 Vapour Permeable
- Ultra-strong material
- Superior heat resistance
- 97% Reflective

Ametalin
Performance insulation for a greener world

SilverWrap™ XHD Micro-perforated
Extra Heavy Duty

81m² COVER **WIDTH:** 1350 mm
LENGTH: 60 m **AREA:** 81 m²

Vapour Permeable reflective wall insulation

For use in brick veneer and drained cavity wall systems in residential and commercial buildings

- Micro-perforated to Class 3 Vapour Permeable
- Superior strength, light weight
- Air Barrier
- Low Flammability, suitable for all BALs in bushfire-prone areas
- 97% reflective

Ametalin
Performance insulation for a greener world

SilverWrap™ xR HD Micro-perforated
Extra R-value Heavy Duty

40.5m² COVER **WIDTH:** 1350 mm
LENGTH: 30 m **AREA:** 40.5 m²

Vapour Permeable reflective wall insulation

For use in brick veneer and drained cavity wall systems in residential and commercial buildings

- Premium double-sided foil
- Micro-perforated to Class 3 Vapour Permeable
- Superior strength, lightweight
- Air Barrier
- Low Flammability, suitable for all BALs in bushfire-prone areas

Ametalin
Performance insulation for a greener world

SilverWrap™ xRS MD Micro-Perforated
Extra R-value Medium Duty

81m² COVER **WIDTH:** 1350 mm
LENGTH: 60 m **AREA:** 81 m²

Vapour Permeable reflective wall insulation

For use in brick veneer and drained cavity wall systems in residential and commercial buildings

- Innovative low-glare, high IR reflection technology
- Micro-perforated to Class 3 Vapour Permeable
- Ideal for drained cavity systems in Climate zones 6-8
- Strong and light weight
- Air Barrier
- Low Flammability, suitable for all BALs in bushfire-prone areas

For full product range and approved accessories please visit,

www.ametalin.com



Ametalin

Performance insulation for a greener world

SilverWrap™ LD Micro-perforated

High-tech reflective permeable wall wrap.



Light Duty

Vapour Permeable reflective wall insulation

For use in brick veneer and drained cavity wall systems in residential and commercial buildings. ABCB Climate Zones 2 - 8.

Micro-perforated to
Class 4 Vapour Permeable

Strong and light weight

Air Barrier

Low Flammability, suitable for all
BALs in bushfire-prone areas

97% reflective



Available roll size: **1500 mm x 30 m (45 m²) | 1350 mm x 60 m (81 m²)**



Ametalin

Performance insulation for a greener world

SilverWrap™ MD Micro-perforated

High-tech reflective permeable wall wrap.



Medium Duty

Vapour Permeable reflective wall insulation

For use in brick veneer and drained cavity wall systems in residential and commercial buildings. ABCB Climate Zones 2-8.

Micro-perforated to
Class 4 Vapour Permeable

Strong and light weight

Air Barrier

Low Flammability, suitable for all
BALs in bushfire-prone areas

97% reflective



Available roll size: **1350 mm x 30 m (40.5 m²) | 1500 mm x 30 m (45 m²)**
1350 mm x 60 m (81 m²)



Ametalin

Performance insulation for a greener world

SilverWrap™ xR Micro-perforated HD

Extra R-value Vapour Permeable reflective wall insulation.



Heavy Duty

Vapour permeable reflective wall insulation

For use in brick veneer and drained cavity wall systems in residential and commercial buildings. ABCB Climate Zones 2 - 8.

Premium double-sided foil

Micro-perforated to
Class 4 Vapour Permeable

Superior strength, lightweight

Air Barrier

Low Flammability, suitable for
all BALs in bushfire-prone areas



Available roll size: **1350 mm x 30 m (40.5 m²)**